REV.	DESCRIPTION	DATE
A		03-2013

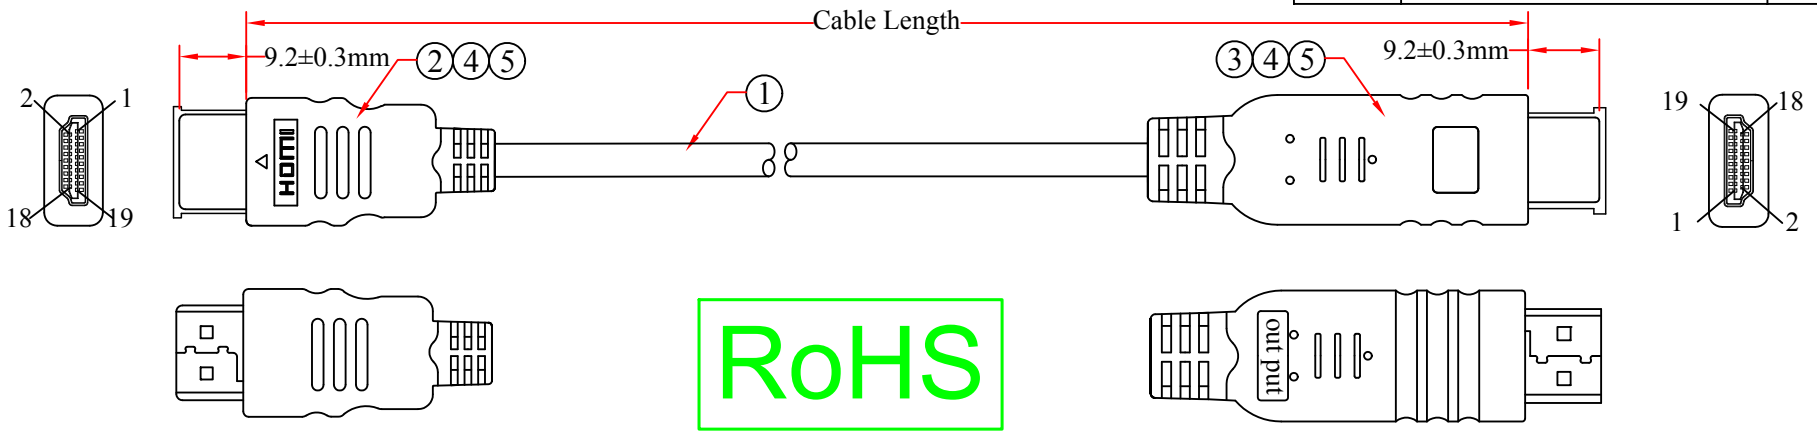

RoHS

PCB Panel:

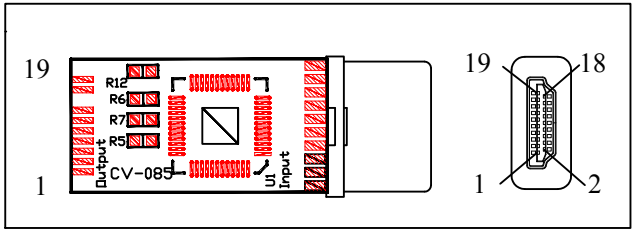

Pin Assignment

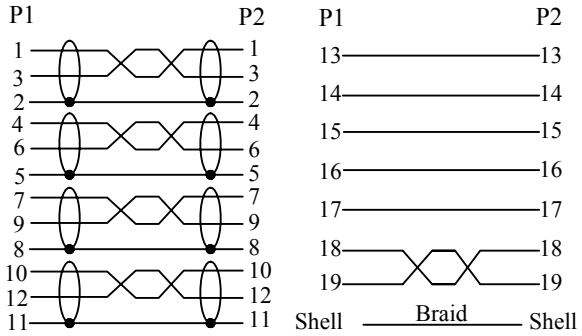

NOTES:

1.Electrical Test:

(1)100% Open Short & Miswire Test.

(2) Insulation Resistance: DC 300V ≥20MΩ

(3) Conductor Resistance: ≤2 Ω

PART NO.	CABLE LENGTH
10V3-41175	75 ft
10V3-411HD	100 ft

NO.	SPECIFICATIONS
5	Molded PVC Hood, Black Color
4	Inner Molded Transparent PE
3	HDMI 19Pin Male,With PCB, Gold Plating, Insulation Black
2	HDMI 19Pin Male,Gold Plating, Insulation Black
1	HDMI v1.3b UL20276[1P*26#(7/0.16TC)+AL+D(7/0.127TC)+ML]*4C+26#(7/0.16TC)*1P +26#(7/0.16TC)*5C+AL+D(7/0.127TC)+AL Braid Shield,OD:8.5mm,Black PVC Jacket

BOM LIST

ITEM NUMBER	10V3-41175&411HD		DRAWER	JL
TITLE	Active HDMI Cable, High Speed, HDMI Male, CL2 rated		CHECKED	
			APPROVED	
MATERIAL		SCALE		
REV.	A	UNIT	INCH	
DRAWING NO:				
ID(NO.)	108			

888-212-8295 CableWholesale.com